



# ENAPART



93 S Railroad Avenue Unit C  
Bergenfield NJ 07621 USA  
[www.enapart.com](http://www.enapart.com)  
[sales@enapart.com](mailto:sales@enapart.com)



Via del Canneto 35,  
Borgosatollo, Brescia - Italia  
[www.enapart.it](http://www.enapart.it)  
[vendite@enapart.it](mailto:vendite@enapart.it)



Barbaros Mah. Ihlamur Bul. Aĝaoĝlu  
My Newwork No:3/15 Ataşehir / İstanbul  
[www.enapart.net](http://www.enapart.net)  
[satis@enapart.net](mailto:satis@enapart.net)



PRIVADA 10 B SUR #3908 COL.  
ANZUREZ, C.P. 72530, PUEBLA, PUE  
[www.enapart.com.mx](http://www.enapart.com.mx)  
[sales@enapart.com.mx](mailto:sales@enapart.com.mx)



Friedrich-Ebert-Anlage 36, 60325  
Frankfurt am Main, Germany  
[www.enapart.de](http://www.enapart.de)  
[anfrage@enapart.de](mailto:anfrage@enapart.de)



4 boulevard Carnot, 95400  
villiers-le-bel, Paris, France  
[www.enapart.fr](http://www.enapart.fr)  
[sales@enapart.fr](mailto:sales@enapart.fr)



65049, ОДЕСА, ВУЛИЦЯ ІВАНА  
ФРАНКА, БУДИНОК 55, ПОВЕРХ 3  
[www.enapart.com.ua](http://www.enapart.com.ua)  
[sales@enapart.com.ua](mailto:sales@enapart.com.ua)



MUNICIPIUL BUCUREȘTI, SECTOR 3,  
B-DUL BASARABIA, NR.250, CORP P+5  
[www.enapart.ro](http://www.enapart.ro)  
[sales@enapart.ro](mailto:sales@enapart.ro)



〒584-0023 大阪府富田林市若松町  
東2丁目2番16号  
[www.enapart.co.jp](http://www.enapart.co.jp)  
[sales@enapart.co.jp](mailto:sales@enapart.co.jp)



PLAZA NUESTRA SEÑORA DE LAS  
NIEVES 12 ,LOCAL ,50012,ZARAGOZA  
[www.enapart.es](http://www.enapart.es)  
[ventas@enapart.es](mailto:ventas@enapart.es)



Складова база „Онгъл“, Склад А2, п.к.  
4006, гр. Пловдив, България  
[www.enapart.bg](http://www.enapart.bg)  
[sales@enapart.bg](mailto:sales@enapart.bg)



3 Austin Mews, High Street, Hemel  
Hempstead, HP1 3AF , United Kingdom  
[www.enapart.co.uk](http://www.enapart.co.uk)  
[sales@enapart.co.uk](mailto:sales@enapart.co.uk)

**CURTISS -  
WRIGHT**

# JOYSTICK CONTROLLERS

FINGER OPERATED

Innovation In Motion



















# SLS 220



SLS 220 linear displacement sensors have a 10mm or 20mm stroke range with a spring loaded operation and a mounting flange to allow easy installation. Contained within a high strength Nylatron® housing, this provides good chemical resistance and low weight. The internal potentiometer assembly is protected to IP66. Suited to OEM and process monitoring applications, this new sensor replaces Penny+Giles HLP 220 model.

## PERFORMANCE


Electrical stroke E	mm	<b>10</b>	<b>20</b>
Resistance	kΩ	0.4 ±15%	0.8 ±10%
Independent linearity	±%	0.5	0.35
Power dissipation at 20°C	W	0.2	0.4
Applied voltage maximum	Vdc	8.9	17.9
Resolution		Virtually infinite	
Hysteresis (repeatability)		Less than 0.01mm	
Operational temperature	°C	-30 to +100	
Output smoothness		To MIL-R-39023 grade C 0.1%	
Insulation resistance		Greater than 100MΩ at 500V d.c.	
Operating mode		Voltage divider only - see Circuit Recommendations on page 2	
Wiper circuit impedance		Minimum of 100 x track resistance or 0.5MΩ (whichever is greater)	
Operating force maximum	kgf	4.0	
Life at 250mm per second		Typically greater than 20 million operations (10 x 10 <sup>6</sup> cycles)	
Sealing		Internally sealed to IP66 (spring loaded plunger is unsealed, so care must be taken when selecting for environments which have a risk of particle contamination)	
Shaft velocity maximum	m/s	2.5	

## AVAILABILITY & ORDERING CODES

Supplied from stock or within five days from the factory

SLS 220/...../.....  
Electrical stroke ———— Resistance

## DIMENSIONS

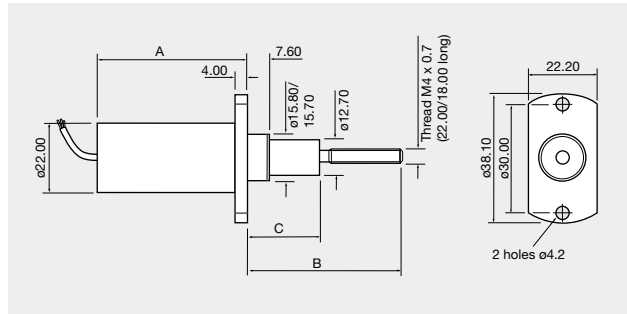

Note: Drawings not to scale

Electrical stroke E	mm	10	20
Mechanical stroke M	mm	12.5	22.5
Body length A	mm	44.4	54.4
Shaft extended - B	mm	43	53
Shaft extended - C	mm	20	30
Weight approximate	g	45	50


Note: Nominal shaft position is fully extended (spring loaded)

## MATERIALS

Body	Nylatron® MC901 (blue)
Shaft	Stainless steel

## ELECTRICAL CONNECTIONS

3 core cable: PUR sheathed 0.3m long with PTFE insulated 7/0.125 cores.

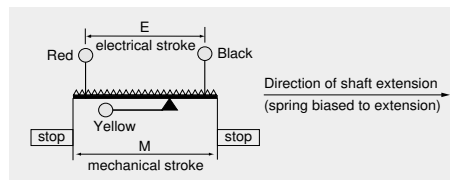

# SLS 320



The SLS 320 range is designed to provide maximum performance benefits within a body diameter of 32mm, with stroke lengths from 250 to 1600mm.

With a choice of mounting options and accessories, this sensor is ideally suited to a wide range of heavier duty industrial applications, for medium to long stroke linear position sensing.

## PERFORMANCE

Electrical stroke E	mm	250	300	350	400	450	500	550	600	650	700	750	800	850	900
Resistance ±10%	kΩ	10	12	14	16	18	20	22	24	26	28	30	32	34	36
Power dissipation at 20°C	W	5.0	6.0	7.0	8.0	9.0	10	11	12	13	14	15	16	17	18

Electrical stroke E	mm	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600
Resistance ±10%	kΩ	38	40	42	44	46	48	50	52	54	56	58	60	62	64
Power dissipation at 20°C	W	19	20	21	22	23	24	25	26	27	28	29	30	31	32

### Independent linearity

guaranteed	±%	0.15
typical	±%	0.05

Applied voltage - maximum **Vdc** 74

Electrical output Minimum of 0.5% to 99.5% applied volts

Resolution Virtually infinite

Hysteresis (repeatability) **mm** Less than 0.01

Operational temperature **°C** -30 to +100

Output smoothness To MIL-R-39023 grade C 0.1%

Insulation resistance Greater than 100MΩ at 500V d.c.

Operating mode Voltage divider only - see Circuit Recommendations on page 2

Wiper circuit impedance Minimum of 100 x track resistance or 0.5MΩ (whichever is greater)

### Operating force - maximum

sealed **gf** 2000 in horizontal plane (break-out force 5000gf)

unsealed **gf** 1500 in horizontal plane (break-out force 2000gf)

Life at 250mm per second Typically in excess of 100 million operations (50 x 10<sup>6</sup> cycles) at 25mm stroke length

Dither life 200 million operations (100 x 10<sup>6</sup> cycles) at ±0.5mm, 60Hz

Sealing IP50 standard - IP66 see options

Shaft seal life 20 million operations (10 x 10<sup>6</sup> cycles) - replaceable

Shaft velocity - maximum **m/s** 10

## OPTIONS

Compact shaft Compact shaft will reduce dimension D by 50mm

Integral shaft seal - IP 66 Designed to accept integral shaft seal to give IP66 rating

Cabled socket 1m or 10m cabled socket assemblies available

Mounting Body clamp or flange mounting kits can be supplied

Protective sleeve kit For all stroke lengths - self aligning bearings only


## AVAILABILITY

Up to 1100mm stroke - All configurations can be supplied within five days from the factory

1150 to 1600mm stroke - All configurations can be supplied within ten days from the factory

## ORDERING CODES

SLS 320/...../..... K/...../...../.....

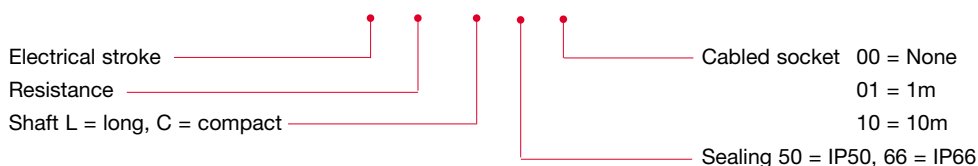

### Accessories (order separately)

Mounting kits — Body clamp kit - SA59661  
Flange kit - SA59660


Protective sleeve kit - SA200991/MK<sup>†</sup>

<sup>†</sup> Check with Penny & Glies for correct part number to match stroke and shaft combination


## DIMENSIONS AND MOUNTING OPTIONS

**Mounting recommendations:**  
For units 1150 to 1600mm stroke, we recommend the use of body clamp or flange mounting kits to support the sensor when horizontally mounted. Alternatively, use the protective sleeve kit with the self aligning bearing mountings to provide increased rigidity.


### SELF ALIGNING BEARING MOUNTING

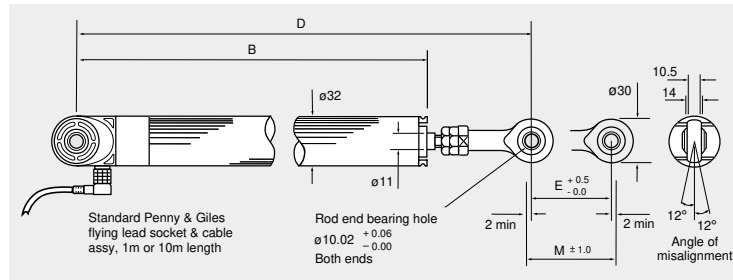


### PROTECTIVE SLEEVE OPTION - SA200991/MK

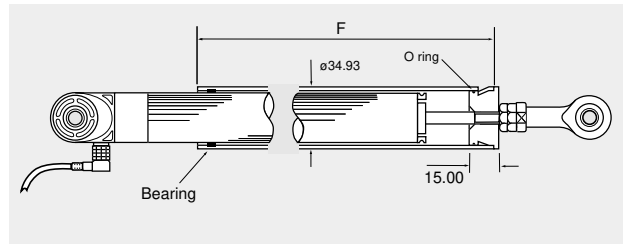

### MOUNTING OPTIONS



#### Body clamp SA59661




#### SA59660 Flange mounting

<b>Electrical stroke E</b>	mm	<b>250</b>	<b>300</b>	<b>350</b>	<b>400</b>	<b>450</b>	<b>500</b>	<b>550</b>	<b>600</b>	<b>650</b>	<b>700</b>	<b>750</b>	<b>800</b>	<b>850</b>	<b>900</b>
<b>Mechanical stroke M</b>	mm	<b>255</b>	<b>305</b>	<b>355</b>	<b>405</b>	<b>455</b>	<b>505</b>	<b>555</b>	<b>605</b>	<b>655</b>	<b>705</b>	<b>755</b>	<b>805</b>	<b>855</b>	<b>905</b>
<b>Body length B</b>	mm	366	416	466	516	601	651	701	751	801	851	901	986	1036	1086
<b>Between centres D</b>															
<b>standard sensor (L)</b>	mm	480	530	580	630	710	760	810	860	910	960	1010	1095	1145	1195
<b>compact shaft sensor (C)</b>	mm	430	480	530	580	660	710	760	810	860	910	960	1045	1095	1145
<b>Sleeve length F</b>															
<b>standard sensor (L)</b>	mm	370	420	470	520	605	655	705	755	805	855	905	990	1040	1090
<b>compact shaft sensor (C)</b>	mm	320	370	420	470	555	605	655	705	755	805	855	940	990	1040
<b>Weight approximate (no sleeve)</b>															
<b>standard sensor (L)</b>	g	590	673	756	839	922	1005	1088	1171	1254	1337	1420	1503	1586	1669
<b>compact shaft sensor (C)</b>	g	555	638	721	804	887	970	1053	1136	1219	1302	1385	1468	1551	1634
<b>Electrical stroke E</b>	mm	<b>950</b>	<b>1000</b>	<b>1050</b>	<b>1100</b>	<b>1150</b>	<b>1200</b>	<b>1250</b>	<b>1300</b>	<b>1350</b>	<b>1400</b>	<b>1450</b>	<b>1500</b>	<b>1550</b>	<b>1600</b>
<b>Mechanical stroke M</b>	mm	<b>955</b>	<b>1005</b>	<b>1055</b>	<b>1105</b>	<b>1155</b>	<b>1205</b>	<b>1255</b>	<b>1305</b>	<b>1355</b>	<b>1405</b>	<b>1455</b>	<b>1505</b>	<b>1555</b>	<b>1605</b>
<b>Body length B</b>	mm	1136	1186	1236	1286	1371	1421	1471	1521	1571	1621	1671	1721	1771	1821
<b>Between centres D</b>															
<b>standard sensor (L)</b>	mm	1245	1295	1345	1395	1480	1530	1580	1630	1680	1730	1780	1830	1880	1930
<b>compact shaft sensor (C)</b>	mm	1195	1245	1295	1345	1430	1480	1530	1580	1630	1680	1730	1780	1830	1880
<b>Sleeve length F</b>															
<b>standard sensor (L)</b>	mm	1140	1190	1240	1290	1375	1425	1475	1525	1575	1625	1675	1725	1775	1825
<b>compact shaft sensor (C)</b>	mm	1090	1140	1190	1240	1325	1375	1425	1475	1525	1575	1625	1675	1725	1775
<b>Weight approximate (no sleeve)</b>															
<b>standard sensor (L)</b>	g	1752	1835	1918	2000	2095	2190	2285	2380	2475	2570	2665	2760	2855	2950
<b>compact shaft sensor (C)</b>	g	1717	1800	1883	1965	2060	2155	2250	2345	2440	2535	2630	2725	2820	2915

## ELECTRICAL CONNECTIONS

### Right angled, cabled socket

E series M12 to IEC 60947-5-2 PUR jacket.  
Conforms to DIN/VDE 0660 part 208A2

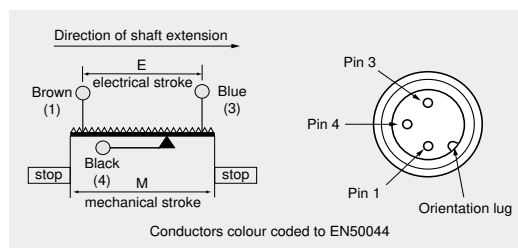

### Cabled Socket

1 metre long No. x61-169-001  
(Hirschmann No. 933 316-021/1m)  
10 metres long No. x61-169-010  
(Hirschmann No. 933 316-021/10m)

# Specialised Designs

We have considerable experience in solving specific application problems by developing our standard designs to suit individual requirements. Custom-designed solutions are also provided where standard equipment does not fully meet our customer's needs.

## ICS 100 In-Cylinder Sensors

Suitable for actuator strokes up to 1100mm

A range of In-Cylinder linear position sensors designed for integration into hydraulic and pneumatic actuators where the sensor is fitted inside the pressurised environment. Using the proven benefits of Hybrid Track Technology and including a number of unique design features, the ICS100 range is ideally suited to high volume OEM actuator manufacturers, where design engineers can specify an affordable alternative for applications where non-contacting technologies may prove too expensive.

Ask for our **ICS100 In-Cylinder Sensors** brochure for full details and designers guide. It can also be downloaded from our website at [www.pennyandgiles.com](http://www.pennyandgiles.com)



## SLS 320 for heavy duty-cycle dynamic applications

A number of specialist applications have demanded an enhanced operating life beyond that capable of the standard SLS320 sealed linear sensor. To meet this requirement, we have developed an oil-filled version of the SLS320, which provides optimum lubrication for the track and sliding mechanism for increased operating life.

Typically the sensors are mounted parallel to actuators fitted to hydraulic motion bases operating leisure ride cabins at amusement parks around the world. Typically the motion bases run a three minute cycle time for up to 12 hours per day. This sensor is ideally suited to similar applications subjected to heavy duty dynamic movements.



### SPECIFICATION SUMMARY

Refer to page 12 and 13 for full performance specification and dimensions

Electrical stroke E	mm	250 to 1100mm only
Sealing		IP66
Shaft seal life		20 million operations (10 x 10 <sup>6</sup> ) - replaceable
Shaft velocity - maximum	m/s	10

### OPTIONS

Compact shaft	Compact shaft will reduce dimension D (page 13) by 50mm
Cabled socket	1m or 10m cabled socket assemblies available
Mounting	Self aligning rod ends standard. Body clamp and flange kits available
Protective sleeve	For 250 to 1100mm stroke lengths - self aligning bearings only.

### AVAILABILITY

Can be supplied within five days from the factory

### ORDERING CODES

D45566/...../..... K/...../ 66 /.....

Electrical stroke	_____	Cabled socket	00 = None
Resistance	_____		01 = 1m
Shaft L = long, C = compact	_____		10 = 10m

### Accessories (order separately)

Mounting kits	Body clamp kit - SA59661
	Flange kit - SA59660

Protective sleeve kit - SA200991/MK

Clamp sleeve (to allow SLS 320 to replace Penny & Giles HLP 350 in existing installations) - P200863 (2 per sensor)

## Special SLS 190

This specially developed SLS 190 variant offers the same mounting dimensions as earlier HLP190 models, but incorporates additional shaft sealing not previously available. M5 steel rod end bearings are fitted, which has become a standard requirement in US NASCAR data acquisition systems. An optional LEMO connector can also be supplied fitted to the cable if required. These potentiometers are ideally suited for retrofit in existing suspension and throttle position applications and will provide high performance and reliability under extreme operating conditions.

### PERFORMANCE

Electrical stroke E	mm	25	50	75	100	125	150	200	250
Resistance $\pm 10\%$	k $\Omega$	1	2	3	4	5	6	8	10
Independent linearity	$\pm\%$	0.25	0.25	0.15	0.15	0.15	0.15	0.15	0.15
Power dissipation at 20°C	W	0.5	1.0	1.5	2.0	2.5	3.0	4.0	5.0
Applied voltage maximum	Vdc	22	44	67	74	74	74	74	74
Electrical output		Minimum of 0.5% to 99.5% applied volts							
Resolution		Virtually infinite							
Hysteresis (repeatability)	mm	Less than 0.01							
Operational temperature	°C	-30 to +100							
Output smoothness		To MIL-R-39023 grade C 0.1%							
Insulation resistance		Greater than 100M $\Omega$ at 500V d.c.							
Operating mode		Voltage divider only - see Circuit Recommendation on page 2							
Wiper circuit impedance		Minimum of 100 x track resistance or 0.5M $\Omega$ (whichever is greater)							
Operating force maximum	gf	500 in horizontal plane							
Life at 250mm per second		Typically greater than 100 million operations ( $50 \times 10^6$ cycles) at 25mm stroke length							
Dither life		200 million operations ( $100 \times 10^6$ cycles) at $\pm 0.5$ mm, 60Hz							
Shaft seal life		20 million operations ( $10 \times 10^6$ cycles) - replaceable							
Shaft velocity maximum	m/s	10							



### OPTIONS

**Connector** Can be supplied with LEMO PHGOB304 CYMD42Z connector and sleeve GMAOB035DG

### AVAILABILITY

Please consult our sales office for details


### ORDERING CODES

D45190/...../.....

Electrical stroke \_\_\_\_\_  
 A - no connector \_\_\_\_\_  
 C - with connector \_\_\_\_\_

### DIMENSIONS

All dimensions shown in mm

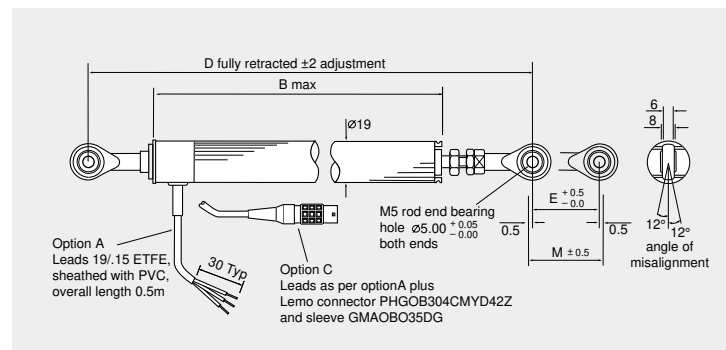

Note: Drawings not to scale

Electrical stroke E	mm	25	50	75	100	125	150	200	250
Mechanical stroke M	mm	29	54	79	104	129	154	204	254
Body length B	mm	107.0	132.0	157.0	207.0	232.0	257.0	307.0	357.0
Between centres D	mm	173.6	198.6	223.6	273.6	298.6	323.6	373.6	423.6
Weight approximate	gm	105	130	145	175	190	205	230	260



## Available from Penny+Giles

A wide range of instrumentation for measurement and control solutions in industrial and aerospace applications. Please ask for more details.

Penny+Giles quality systems meet the requirements of ISO9001, the Civil Aviation Authority and numerous customer's certification standards.

Quality is at the heart of all our systems ensuring the reliability of our products from initial design to final despatch.




Registered No. 924881



- VRVTs
- LVDTs - industrial/aerospace
- Hybrid Linear Potentiometers
- Solenoids
- Rotary Potentiometers
- Joystick Controllers
- In-Cylinder Transducers

## Contact Worldwide

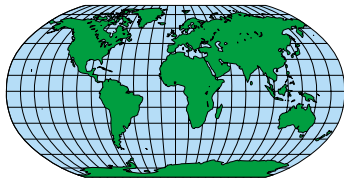

### WEB SITE

[www.pennyandgiles.com](http://www.pennyandgiles.com)

### UNITED KINGDOM

**Penny+Giles Controls Ltd**  
 15 Airfield Road  
 Christchurch  
 Dorset BH23 3TJ  
 Telephone: +44 (0) 1202 409409  
 Fax: +44 (0) 1202 409410  
 Email: [xsales@pennyandgiles.com](mailto:xsales@pennyandgiles.com)

### USA

**Penny+Giles Controls Inc**  
 12701 Schabarum Avenue  
 Irwindale CA 91706  
 Telephone: +1 626 337 0400  
 Fax: +1 626 337 0469  
 Email: [us.sales@pennyandgiles.com](mailto:us.sales@pennyandgiles.com)

### GERMANY

**Penny+Giles GmbH**  
 Straussenlettenstr. 7b  
 85053 Ingolstadt  
 Telephone: +49 (0) 841 61000  
 Fax: +49 (0) 841 61300  
 Email: [info@penny-giles.de](mailto:info@penny-giles.de)

**Penny+Giles products are in service with these industries throughout the world.**

Aerospace  
 Automotive  
 Construction  
 Defence  
 Leisure  
 Marine  
 Material handling  
 Mining

Motorsport  
 Off-highway  
 Petrochemical  
 Plastics and Rubber  
 Power generation  
 Process control  
 Transportation  
 Timber and Forestry

The information contained in this brochure on product applications should be used by customers for guidance only. Penny & Giles Controls Ltd. makes no warranty or representation in respect of product fitness or suitability for any particular design application, environment, or otherwise, except as may subsequently be agreed in a contract for the sale and purchase of products. Customer's should therefore satisfy themselves of the actual performance requirements and subsequently the products suitability for any particular design application and the environment in which the product is to be used.

Continual research and development may require change to products and specification without prior notification. All trademarks acknowledged

© Penny+Giles Controls Ltd 2003

**Penny+Giles**  
 A Curtiss-Wright Company